

Copy No.1- 0
Copy No.2- Q-par Angus

15 to 22 GHz

Standard Gain Horn Antenna

WG19


P/N QSH19S20S

S/N 4272

Date: 08-Apr-13

File: D1084A

Contents: **Summary**
Antenna Gain
Beamwidth
VSWR

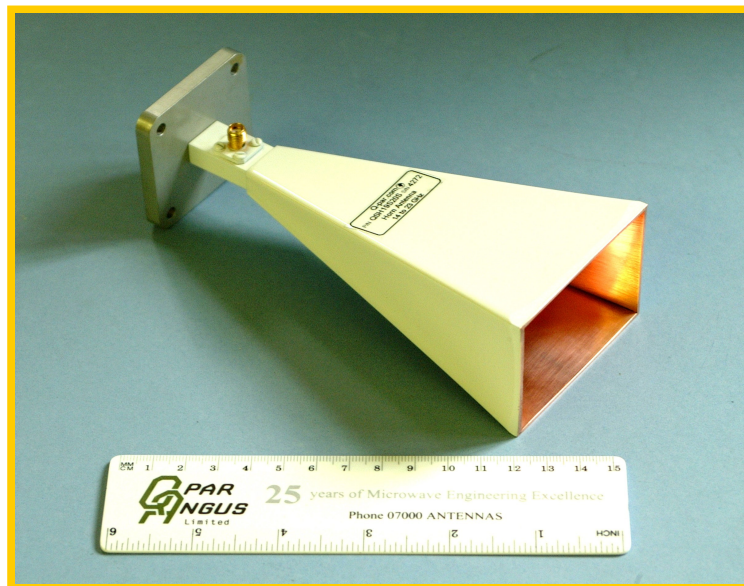

Q-par Angus Ltd
Barons Cross Laboratories
Leominster
Herefordshire
HR6 8RS
UK



Commercial in Confidence

INTRODUCTION

This report is produced for - 0

The report covers full electrical testing.

MEASURED RESULTS

ANTENNA GAIN

This is calculated by reference to standard gain horn antennas.

The gain measurement is cross checked with reference to the antenna beamwidth with an estimated error of +/- 0.5 dB

SUMMARY OF RESULTS

Frequency (GHz)	15 to 22 GHz
Connector type	SMA jack
VSWR	< 1.6 : 1
Gain	17 to 21dBi
Power Handling	20 Watt c.w.
Weight	346 gms.
Size - max.	69 mm x 49 mm external aperture 156 mm long (inc.mount plate)
Mounting	Mounting Plate 50 mm x 50 mm 4 holes, diameter 4.1, 38 mm centres

Q-par Angus Ltd
Barons Cross Laboratories
Leominster
Herefordshire
HR6 8RS
UK



ANTENNA GAIN

Q-Par Angus Ltd has calibrated the component(s) below in accordance with documents using test equipment and standards whose accuracy is traceable to National Standard:

Accuracy - Antenna Patterns +/- 0.5 degree Gain +/- 0.5 dB

Date of Calibration **08-Apr-13**

Q-Par Ref. **D1084A**

Customer **0**


Manufacturer **Q-Par Angus**


Part No. **QSH19S20S**

Frequency Range **15 to 22 GHz**

Serial No. **4272**

Product **Standard Gain Horn Antenna**

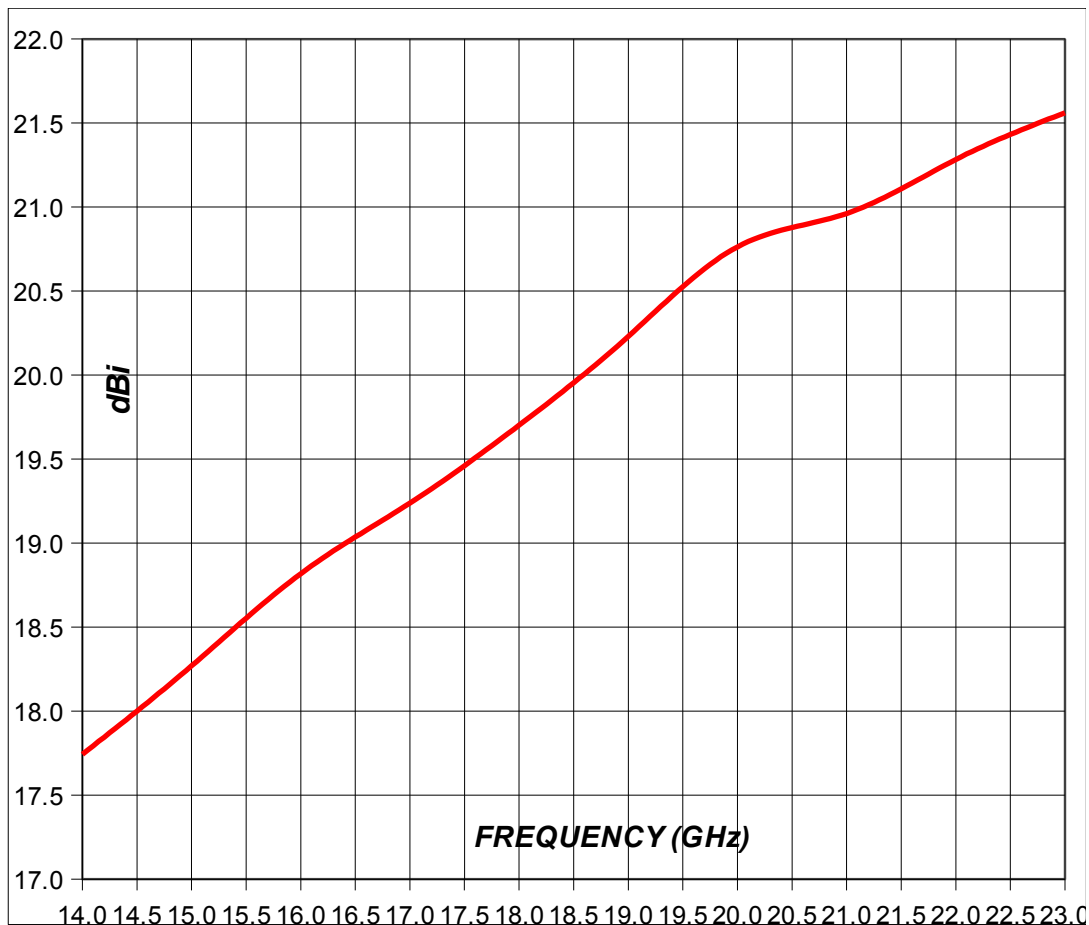

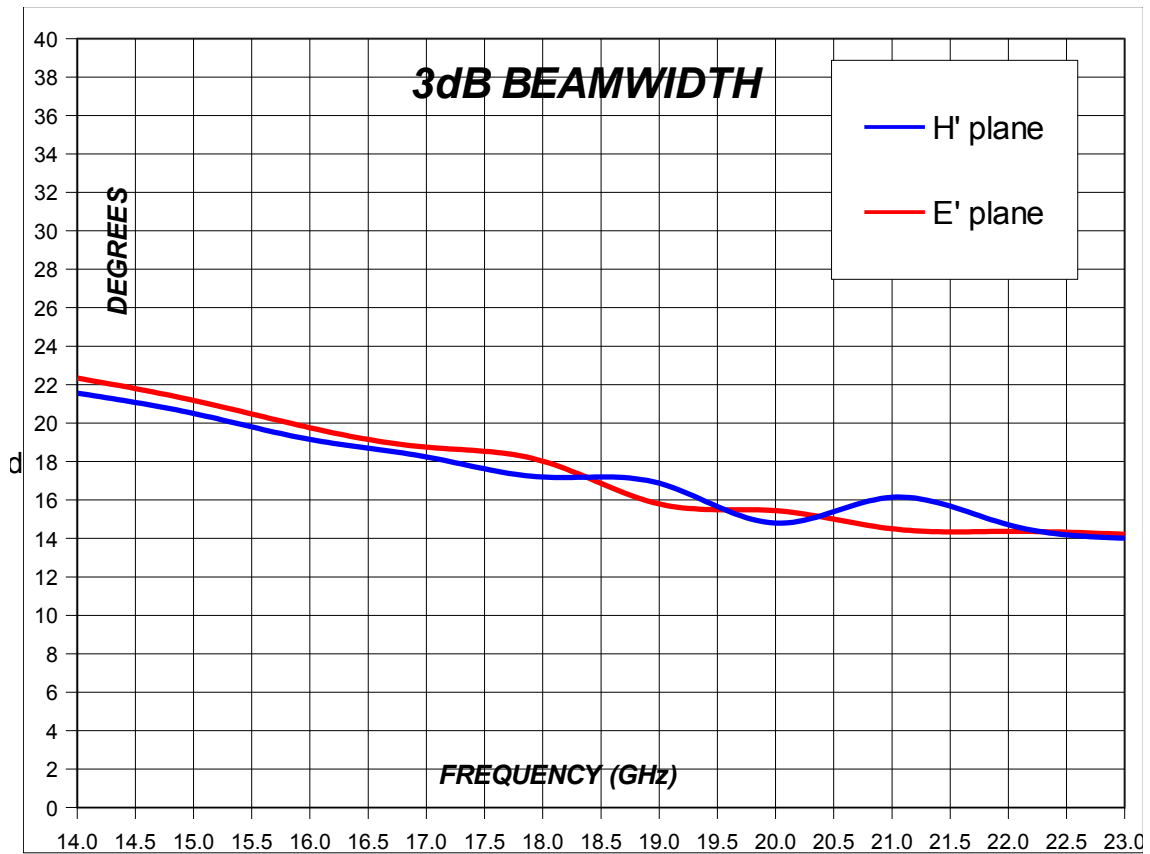

Measured Beamwidths

