



Ultra-Wideband Dual Polar Horn

0.9 to 18 GHz

Catalogue number:	QWH-DL-0.9-18-S-SG-R
Q-par reference:	QMS-00250
Contents:	Summary Typical Antenna Gain Typical Beamwidth / Patterns VSWR Isolation







Typical Specification


Frequency	0.9 to 18 GHz
Connector type	2 x SMA Female
Power Handling	40 Watt c.w.
VSWR	Typically < 2.5:1
Gain	0.3 to 13.3 dBi
Antenna Factor	26.9 to 44.4 dB/m
3dB Beamwidth	20 to 120 degrees
Isolation	> 25 dB between connectors
Weight	1.8 kg
Size- max.	215 mm diameter x 230 mm long
Mounting	4 holes M6 on a 90.8 mm PCD
Construction	Anodised aluminium and engineering plastics. Painted.


Typical Antenna Gain / Factor


This is calculated by reference to standard gain horn antennas, and cross checked with reference to the antenna beamwidth, with an estimated error of +/- 2 dB.

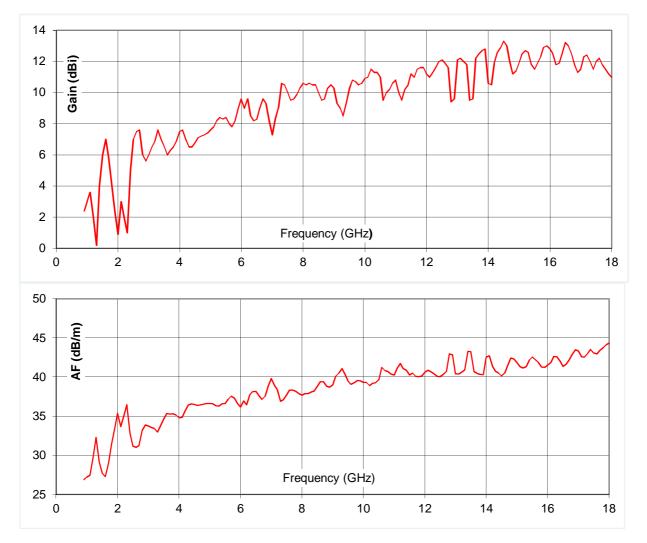


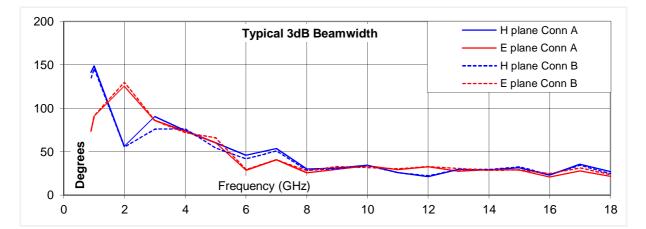


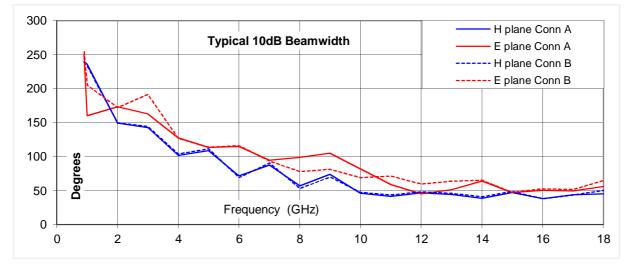












* Red trace = E-plane, Blue trace = H-plane cut

STEATITE LIMITED (ANTENNAS) UNIT 15 CROFT BUSINESS PARK SOUTHERN AVENUE LEOMINSTER HEREFORDSHIRE HEREFORDSHIRE STEATITE LIMITED (HEADQUARTERS) RAVENSBANK BUSINESS PARK ACANTHUS ROAD REDDITCH WORCESTERSHIRE B98 9EX WWW.STEATITE.COM DLID STATE GROUP COMPANY

Telephone: **+44 (0)1568 617920** Fax: **+44 (0)1568 612138** Email: **sales.antennas@steatite.co.uk**

