



Broadband Horn


2 to 4 GHz

WRD200

Catalogue number: **QWH-SL-2-4-C-SG-R**

Q-Par reference: **QMS-00496**

Contents: **Summary**
Antenna Gain
Beamwidth
VSWR

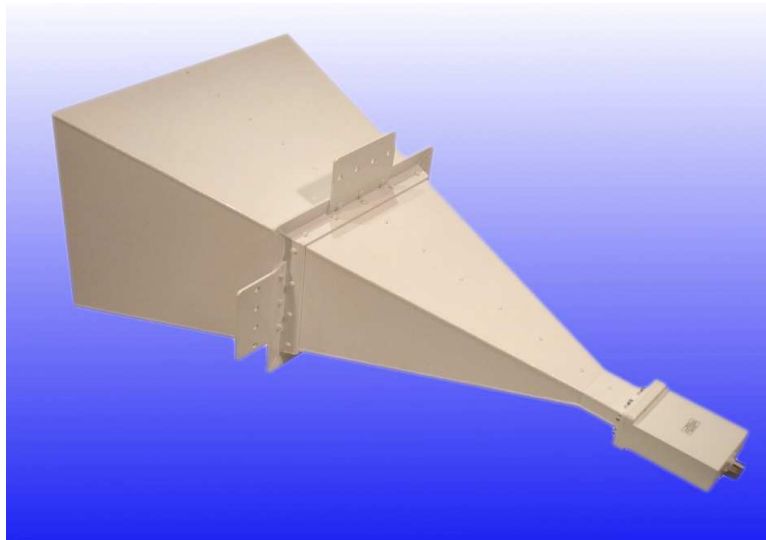

This report covers full electrical testing and has been produced for


-

Summary

Frequency	2 to 4 GHz
Connector type	WRD200 Transition to SC type precision jack
VSWR	< 1.6:1
Gain	16.4 to 18.1 dBi
Power handling	10 kW peak, 750 W mean
Weight	14 kg + 1.76 kg transition = 15.76 kg
Size- max.	555 mm x 426 mm x 986 mm long (1151 mm with transition)
Mounting	2 mounting plates, with 4 x 10 mm diameter holes, 40 mm centres

Typical Antenna Gain

This is calculated by reference to standard gain horn antennas, and cross checked with reference to the antenna beamwidth, with an estimated error of +/- 0.8dB.

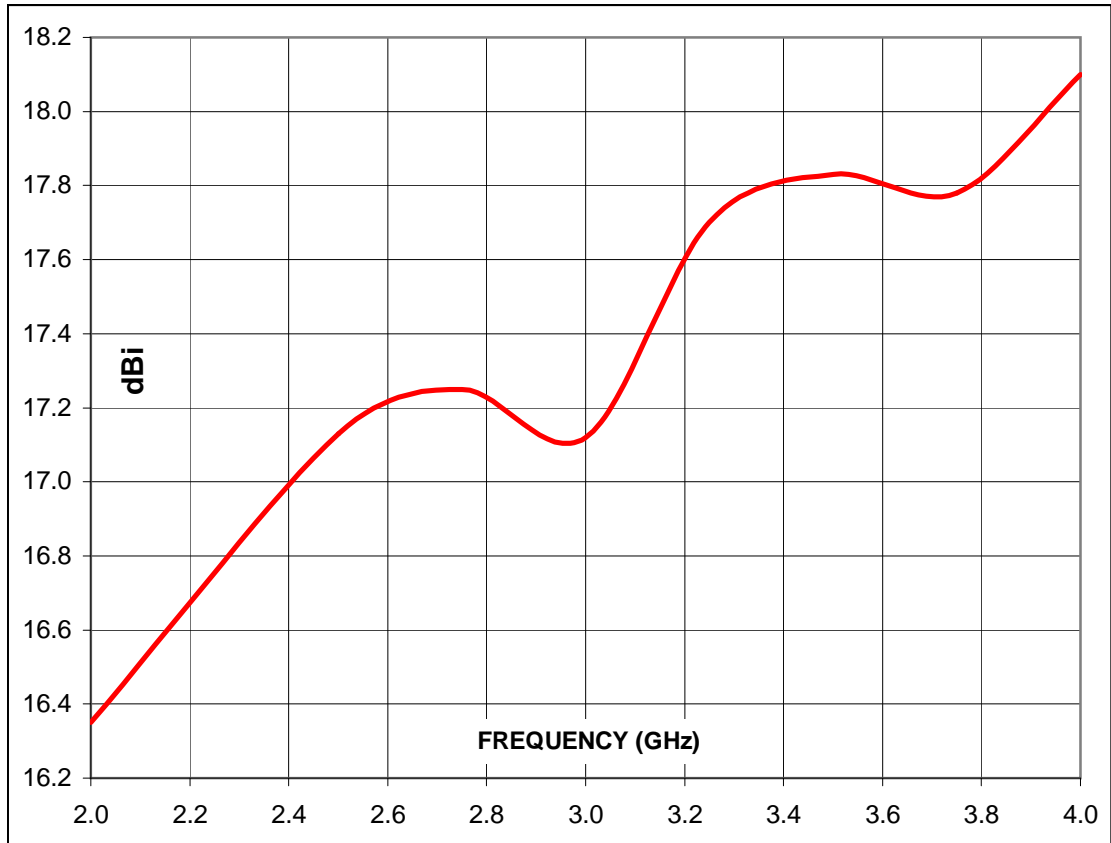

The recommended far field range for this antenna is > 7.8 Metres

Frequency GHz	Gain dBi	Antenna Factor dB/m
2.0	16.4	19.9
2.5	17.1	21.1
3.0	17.1	22.7
3.5	17.8	23.3
4.0	18.1	24.2

